

Characteristics

Material

- Sheet Steel (EN 10130 DC01 CCRS)
 - Body : 1.5 mm
 - Door : 2 mm
 - Plinth : 2 mm
- Galvanized Steel (EN 10346 DX51D+Z)
 - Mounting plate : 2 mm

Surface Finishing

- RAL7035w powder coating

IP Rating

- IP54 (TS 3033, EN 60529)

Others

- Foamed-in door PU sealing gasket
- 150° opening front door
- Removable lower side panels
- Depth adjustable mounting plate
- Facility for double mounting plate

On Request

- Special sizes
- Special colour
- Pre-punching
- Special mounting plate




Supply Includes

- Body
- Door and lids
- Mounting plates
- Plinth
- 4+4 pcs side rails


Complementary Accessories

- Door inside mounting profile
- Plan pocket
- Earthing cable


Width	Height	Depth	Reference	Lower Door	Removable Rear Panel	Useful Area						Mounting Plate		Weight
						Top Lid		Middle Lid		Lower Door		↔	↕	
A	B	C				↔	↕	↔	↗	↔	↕	↔	↕	kg
mm	mm	mm		pcs	pcs	mm	mm	mm	mm	mm	mm	mm	mm	
600	1320	400	PY 061340	1	1	500	265	495	360	420	420	502	502	68.6
800	1320	400	PY 081340	1	1	700	265	695	360	620	420	702	502	85.3
1200	1320	500	PY 121350	2	1	1100	265	1095	460	420 + 420	420	1102	502	122.2

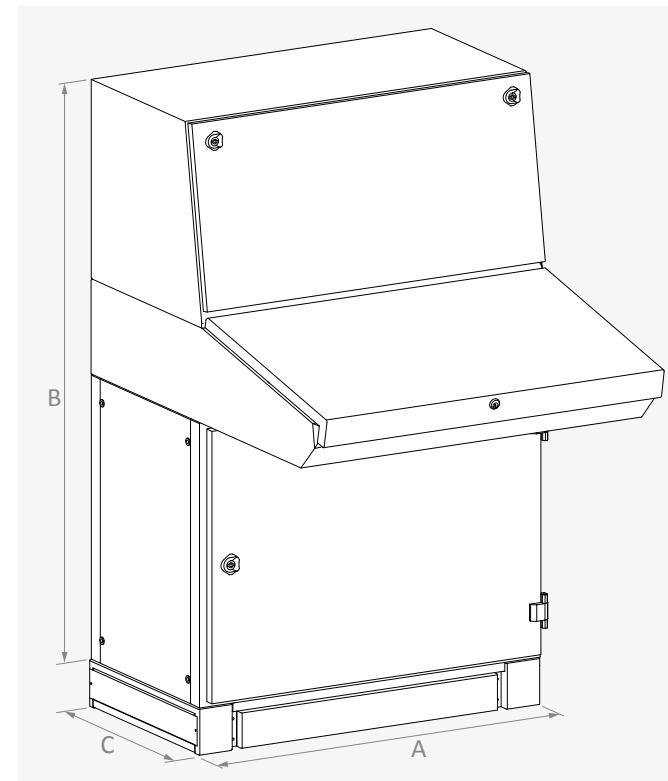


LOWER DOOR USEFUL AREA

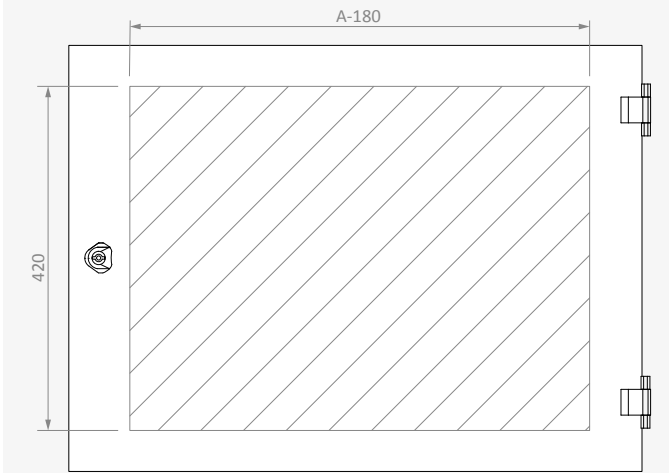


MIDDLE LID USEFUL AREA

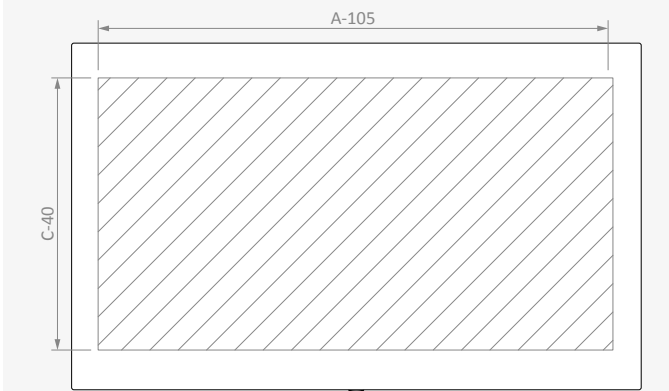


TOP LID USEFUL AREA

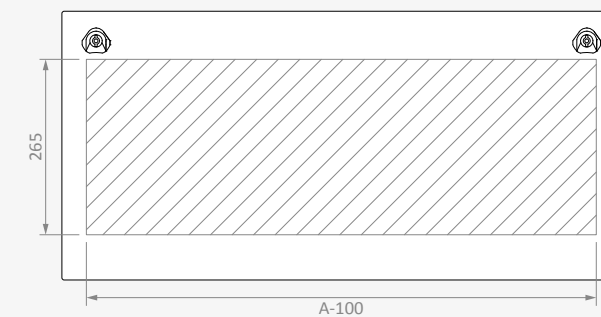

TOP REAR PANEL USEFUL AREA

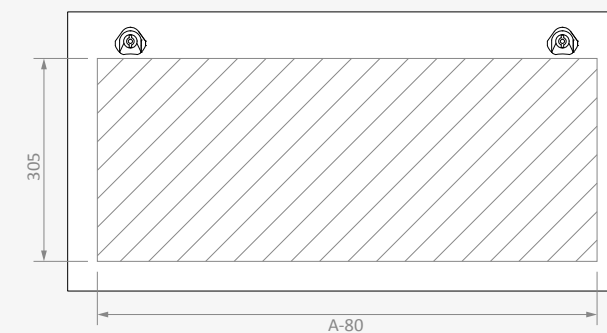


MOUNTING PLATE

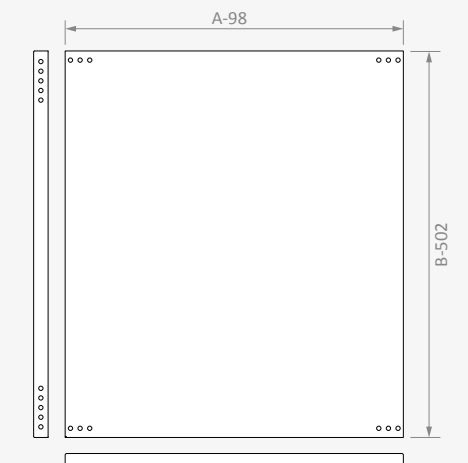

TOP LID

Reference	Width		Wide	Length	Useful Area		Lid	Lock Type	Hinge	Weight
	A mm	B mm			W1 mm	H1 mm				
PY UKKP0642	600	1320	595	387	500	265	1	C	2	3.8
PY UKKP0842	800	1320	795	387	700	265	1	C	2	4.9
PY UKKP1242	1200	1320	1195	387	1100	265	1	C	2	7.3


Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Hinges	
Thickness	2 mm	* C: Quarter Turn	

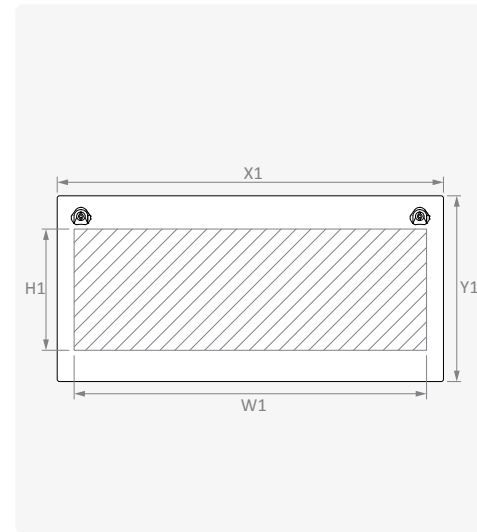

LOWER DOOR

Reference	Width		Wide	Length	Useful Area		Door	Lock Type	Hinge	Weight
	A mm	B mm			W1 mm	H1 mm				
AS KP0606	600	1320	575	575	420	420	1	C	2	5.2
AS KP0806	800	1320	775	575	620	420	1	C	2	7.1
PY AKKP1260	1200	1320	587 + 587	575	420 + 420	420	2	C	4	10.8


Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Hinges	
Thickness	2 mm	* C: Quarter Turn	

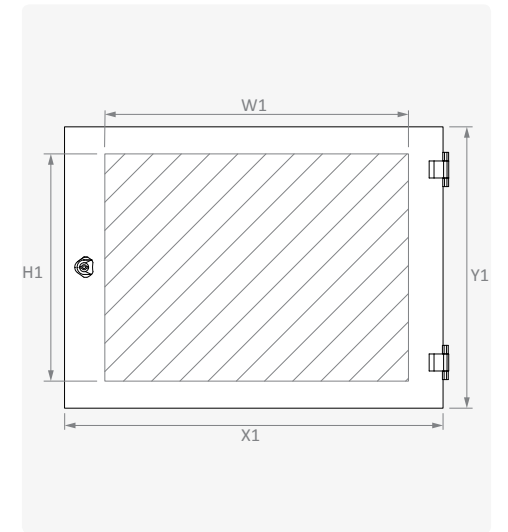

MIDDLE LID

Reference	Width		Wide	Length	Useful Area		Hinge	Lock Type	Weight
	A mm	C mm			W1 mm	H1 mm			
PY OKKP0620	600	400	595	500	495	360	2	C	4.7
PY OKKP0820	800	400	795	500	695	360	2	C	6.3
PY OKKP1220	1200	500	1195	500	1095	460	2	C	9.5


Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Hinges	
Thickness	2 mm	* C: Quarter Turn	

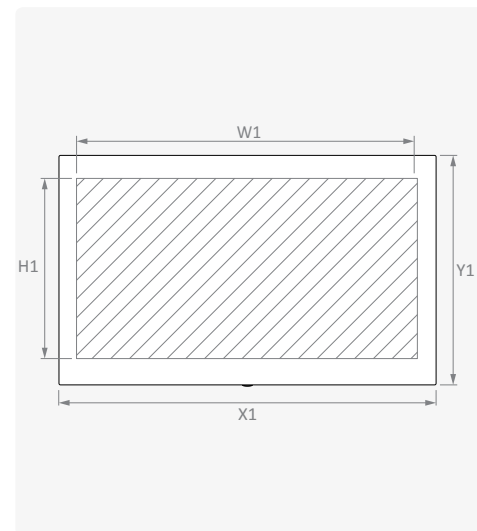

TOP REAR PANEL

Reference	Width		Wide	Length	Useful Area		Lock	Lock Type	Weight
	A mm	B mm			W1 mm	H1 mm			
PY UKST0642	600	1320	556	375	520	305	2	C	3.3
PY UKST0842	800	1320	756	375	720	305	2	C	4.5
PY UKST1242	1200	1320	1156	375	1120	305	2	C	6.9


Characteristics		Supply Includes	
Material	DIN EN 10130 DC01 CCRS	Lock	
Surface Finishing	RAL7035w powder coating	Hinges	
Thickness	2 mm	* C: Quarter Turn	

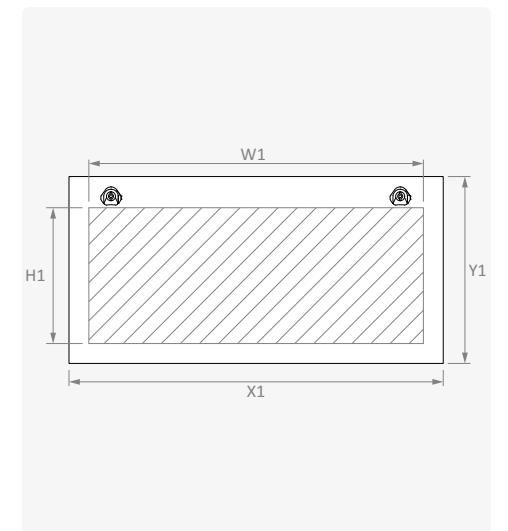

MOUNTING PLATE

Reference	Width		Height	Wide		Length				Connection				Weight
	A	B		X1	Y1	X2	Y2	X3	Y3	n				
	mm	mm	mm	mm	mm	mm	mm	mm	mm	pcs	kg			
AS TS 0606	600	600	600	502	502	441	380	420	-	4	5.0			
AS TS 0806	800	600	600	702	502	641	380	620	-	4	6.8			
AS TS 1206	1200	600	600	1102	502	1041	380	1020	800	4	16.4			


Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm	Carriage slide support and fasteners	

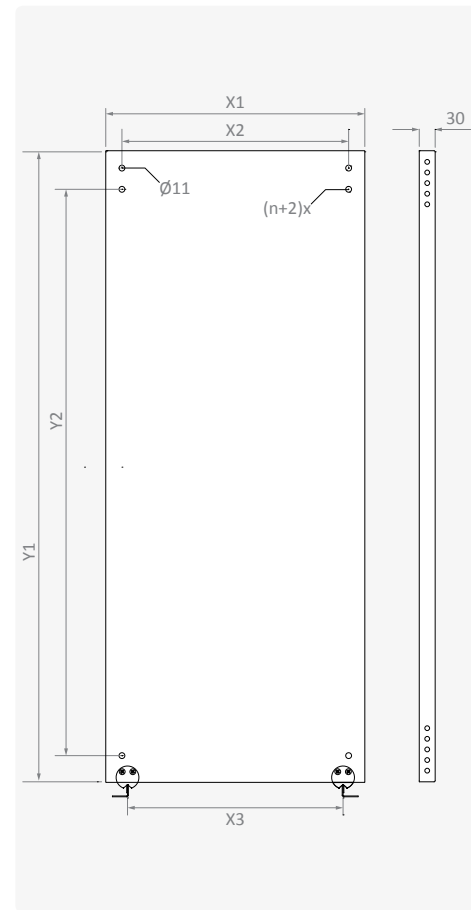

PARTIAL MOUNTING PLATE

Reference	Width		Length		Connection		Weight
	A	X1	Y1	Y3	X2	Y2	
	mm	mm	mm	mm	mm	mm	kg
AS TSK 0636	600	512	360	330	495	340	3,3
AS TSK 0836	800	712	360	330	695	340	4,7
AS TSK 1236	1200	1112	360	330	1095	340	7,3


Characteristics		Supply Includes	
Material	DIN EN 10327 DX51D+Z galvanized	Mounting screws	
Thickness	2 mm		

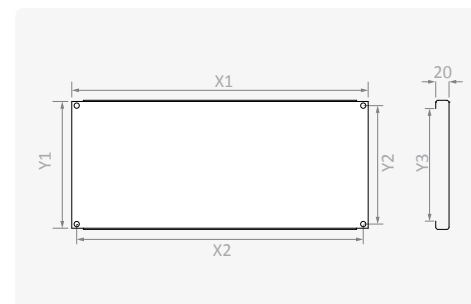

SIDE RAILS

Reference	Depth	Length	Connection		Weight	Characteristics	
			Z2	Z3		Material	Thickness
	mm	mm	mm	mm	kg	DIN EN 10327 DX51D+Z galvanized	1.5 mm
AS SR 040	400	224	211	192	0.2		
AS SR 050	500	324	311	292	0.3		
AS SR 060	600	424	411	392	0.4		


Supply Includes
 ■ Mounting screws

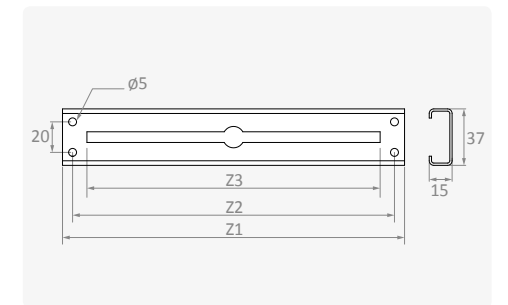

PLAN POCKETS

Reference	Width	Length			Weight	Characteristics	
		X1	Y1	Z1		Material	Surface Finishing
	mm	mm	mm	mm	kg	DIN EN 10130 DC01 CCRS	RAL7035w powder coating
AS PJ 040	All Dimensions	A4	200	30	0.4		
AS PJ 060	600/1200	A3	240	60	1.9		
AS PJ 080	800	A3	240	60	2.6		

Supply Includes
 ■ Mounting fasteners to fix door reinforcement frame

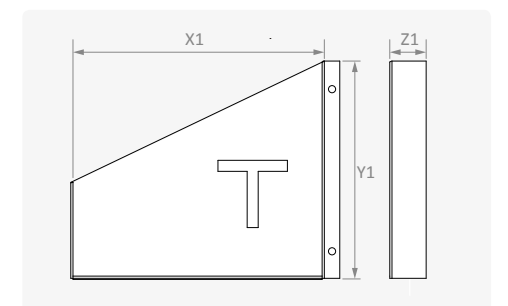

LOCK AND KEYS

Reference	Lock Type	Material		Description	Key Code
		Casing	Cam		
	*			Key Type	**
KIATKY2535796T1	C	Polyamide	Polyamide	5 mm Double-bit	KIAN 0100

* C: Quarter Turn; I: Escutcheon
 ** Keys should be ordered separately.



EARTHING CABLE

Reference	Material	Cross Section	Length	Connection	Packet	Weight
KB TP 16092750	Nickel plated, braided copper conductor	16	275	M8-M8	50	0.2
KB TP 16093500		16	320	M8-M8	50	0.2

